


Taper roller bearings single row


Metric series

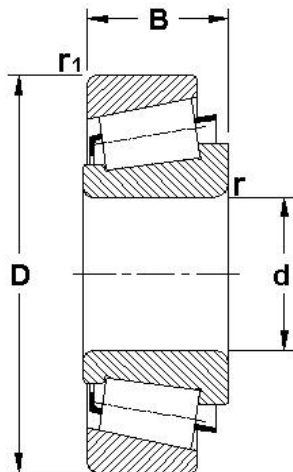

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
15	35	11.75	0.6	0.6	12500	11800	30202
	42	14.25	1	1	22400	20000	30302
17	40	13.25	1	1	19000	18600	30203
	47	15.25	1	1	28100	25000	30303
	47	20.25	1	1	34700	33500	32303
18	47	14.383	2	2	26400	43300	I 100545/I 100546
20	42	15	0.6	0.6	24200	27000	32004
	47	15.25	1	1	27500	28000	30204
	52	16.25	1.5	1.5	34100	32500	30304
	52	22.25	1.5	1.5	44000	45800	32304
22	44	15	0.6	0.6	25100	29000	320/22
	47	17	1	1	34100	36500	T2CC 022
25	47	15	0.6	0.6	27000	32500	32005
	52	16.25	1	1	30800	33500	30205
	52	19.25	1	1	35800	44000	32205
	52	22	1	1	47300	56000	33205
	62	18.25	1.5	1.5	44600	43000	30305
	62	18.25	1.5	1.5	38000	40000	31305
	62	25.25	1.5	1.5	60500	63000	32305
28	52	16	1	1	31900	38000	320/28
	58	20.25	1	1	41800	50000	322/28
	70	20.5	1.5	1.5	59500	96100	1838051/52
30	55	17	1	1	35800	44000	32006
	62	17.25	1	1	40200	44000	30206
	62	21.25	1	1	50100	57000	32206
	62	21.25	1	1	49500	58500	32206 B
	62	25	1	1	64400	76500	33206
30	72	20.75	1.5	1.5	56100	56000	30306
	72	20.75	1.5	1.5	47300	50000	31306

Taper roller bearings single row


Metric series

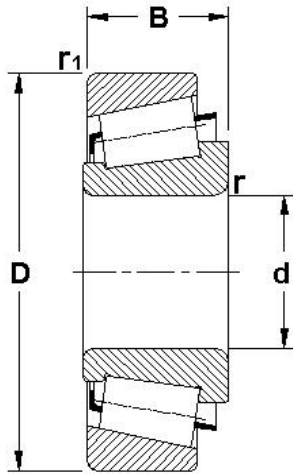

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
	72	28.75	1.5	1.5	76500	85000	32306
32	58	17	1	1	36900	46500	320/32
33	62	16	2.5	2.5	43500	76300	1838055/1838056
35	62	18	1	1	42900	54000	32007
	72	18.25	1.5	1.5	51200	56000	30207
	72	24.25	1.5	1.5	66000	78000	32207
	72	24.25	1.5	1.5	60500	75000	32207 B
	72	28	1.5	1.5	84200	106000	33207
	80	22.75	2	1.5	72100	73500	30307
	80	22.75	2	1.5	61600	67000	31307
40	80	32.75	2	1.5	95200	106000	32307
	80	32.75	2	1.5	93500	114000	32307 B
	68	19	1	1	52800	71000	32008
	75	26	1.5	1.5	79200	104000	33108
	80	19.75	1.5	1.5	61600	68000	30208
	80	24.75	1.5	1.5	74800	86500	32208
45	80	32	1.5	1.5	105000	132000	33208
	85	33	2	1.5	121000	150000	T2EE 040
	90	25.25	2.5	2	85800	95000	30308
	90	25.25	2	1.5	73700	81500	31308
	90	35.25	2	1.5	117000	140000	32308
	90	35.25	2	1.5	108000	140000	32308 B
	95	27.5	2	1.5	94400	170400	331257
45	75	20	1	1	58300	80000	32009
	80	26	1.5	1.5	84200	114000	33109
	85	20.75	1.5	1.5	66000	76500	30209
45	85	24.75	1.5	1.5	80900	98000	32209
	85	27.75	1.5	1.5	80900	98000	32209 sp
	85	27.75	1.5	1.5	73700	93000	32209 B
	85	32	1.5	1.5	108000	143000	33209

Taper roller bearings single row


Metric series

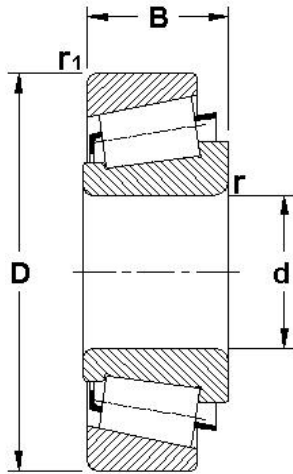

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
50	95	29	2.5	2.5	89700	112000	T7FC 045
	95	36	2.5	2.5	147000	186000	T2ED 045
	100	27.25	2	1.5	108000	120000	30309
	100	27.25	2	1.5	91300	102000	31309
	100	38.45	2	1.5	140000	170000	32309
	100	38.45	2	1.5	134000	176000	32309 B
	80	20	1	1	60500	154800	32010
	80	24	1	1	69300	102000	33010
	82	21.5	3	0.5	72100	100000	K-JLM 104948/K-JLM 104910
	85	26	1.5	1.5	85800	122000	33110
	90	21.75	1.5	1.5	76500	91500	30210
	90	24.75	1.5	1.5	82500	100000	32210
	90	24.75	1.5	1.5	82500	104000	32210 B
	90	28	3	2.5	106000	140000	K-JLM 205149/K-JLM 205110
	90	28	3	0.8	106000	140000	K-JLM 205149/K-JLM 205110 A
	90	32	1.5	1.5	114000	160000	33210
100	36	2.5	2.5	154000	200000	T2ED 050	
105	32	3	3	108000	137000	T7FC 050	
110	29.25	2.5	2	125000	140000	30310	
110	29.25	2.5	2	106000	120000	31310	
110	42.25	2.5	2	172000	212000	32310	
110	42.25	2.5	2	161000	216000	32310 B	
55	90	23	1.5	0.5	78100	112000	K-JLM 506849/K-JLM 506810
90	23	1.5	1.5	80900	116000	32011	
99	27	1.5	1.5	89700	137000	33011	
55	95	30	1.5	1.5	110000	156000	33111
100	22.75	2	1.5	89700	106000	30211	
100	26.75	2	1.5	106000	129000	32211	
100	26.75	2	1.5	101000	127000	32211 B	
100	35	2	1.5	138000	190000	33211	
110	39	2.5	2.5	179000	232000	T2ED 055	
115	34	3	3	125000	163000	T7FC 055	

Taper roller bearings single row


Metric series

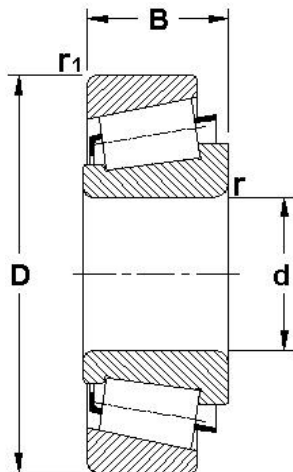

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
60	120	31.5	2.5	2	142000	163000	30311
	120	31.5	2.5	2	121000	137000	31311
	120	45.5	2.5	2	198000	250000	32311
	120	45.5	2.5	2	190000	260000	32311 B
	95	23	1.5	1.5	82500	122000	32012
	95	24	5	2.5	84200	132000	K-JLM 508748/K-JLM 508710
	95	27	1.5	1.5	91300	143000	33012
	100	30	1.5	1.5	117000	170000	33112
	110	23.75	2	1.5	99000	114000	30212
	110	29.75	2	1.5	125000	160000	32212
	110	38	2	1.5	168000	236000	33212
	115	39	4	2.5	168000	250000	T5ED 060
	115	40	2.5	2.5	194000	260000	T2EE 060
	125	37	3	3	154000	204000	T7FC 060
	110	29.75	2.5	0.5	125000	160000	330201
	120	45.5	3	2.5	194200	408700	215424 C
130	33.5	3	2.5	168000	196000	30312	
130	33.5	3	2.5	145000	166000	31312	
130	48.8	3	2.5	229000	290000	32312	
130	48.8	3	2.5	220000	305000	32312 B	
135	33.45	3.5	3.5	161900	304600	330632	
65	100	23	1.5	1.5	84200	127000	32013
	100	27	1.5	1.5	96800	156000	33013
	110	28	3	2.5	123000	183000	K-JM 511946/K-JM 511910
	110	34	1.5	1.5	142000	208000	33113
	120	24.75	2	1.5	114000	134000	30213
	120	32.75	2	1.5	151000	193000	32213
	120	39	4	2.5	161000	240000	T5ED 065
	120	39	3	2.5	187000	265000	K-JH 211749/K-JH 211710
	120	41	2	1.5	194000	270000	33213
	130	37	3	3	157000	216000	T7FC 065
	140	36	3	2.5	194000	228000	30313

Taper roller bearings single row


Metric series

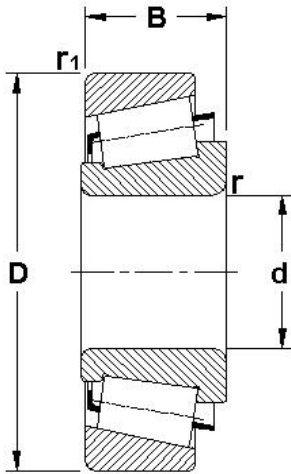

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C	Static Co	
70	140	36	3	2.5	165000	193000	31313
	140	51	3	2.5	264000	335000	32313
	140	51	3	2.5	246000	345000	32313 B
	145	40	3	3	198400	386600	77213
	150	53.5	2.5	2	301200	649700	215426 C
	110	25	1.5	1.5	101000	153000	32014
	110	26	1	2.5	101000	160000	K-JLM 803146/K-JLM 803110
	110	31	1.5	1.5	130000	196000	33014
	120	37	2	1.5	172000	250000	33114
	125	26.25	2	1.5	125000	156000	30214
	125	33.25	2	1.5	157000	208000	32214
	125	41	2	1.5	201000	285000	33214
	130	43	3	2.5	233000	325000	T2ED 070
	140	39	3	3	176000	240000	T7FC 070
	140	52	5	3	281000	405000	T4FE 070
150	38	3	2.5	220000	260000	30314	
150	38	3	2.5	187000	220000	31314	
150	54	3	2.5	297000	380000	32314	
150	54	3	2.5	281000	400000	32314 B	
75	105	20	1	1	70400	116000	32915
	115	25	1.5	1.5	106000	163000	32015
	115	31	1.5	1.5	134000	228000	33015
	120	31	3	2.5	138000	216000	K-JM 714249/K-JM 714210
	125	37	2	1.5	176000	265000	33115
	130	27.25	2	1.5	140000	176000	30215
	130	33.25	2	1.5	161000	212000	32215
	130	41	2	1.5	209000	300000	33215
	145	51	3	2.5	308000	450000	K-JH 415647/K-JH 415610
	150	42	3	3	201000	280000	T7FC 075
	160	40	3	2.5	246000	290000	30315
	160	40	3	2.5	209000	245000	31315
	160	58	3	2.5	336000	440000	32315

Taper roller bearings single row


Metric series

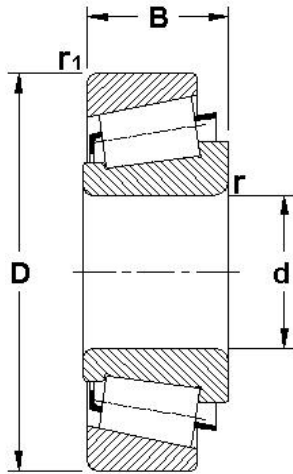

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
80	160	58	3	2.5	336000	475000	32315 B
	125	29	1.5	1.5	138000	216000	32016
	125	36	1.5	1.5	168000	285000	33016
	130	37	2	1.5	179000	280000	33116
	140	28.25	2.5	2	151000	183000	30216
	140	35.25	2.5	2	187000	245000	32216
	140	46	2.5	2	251000	375000	33216
	145	46	3	2.5	281000	400000	T2ED 080
	170	42.5	3	2.5	270000	320000	30316
	170	42.5	3	2.5	224000	265000	31316
	170	61.5	3	2.5	380000	500000	32316
	170	61.5	3	2.5	358000	520000	32316 B
85	130	29	1.5	1.5	140000	224000	32017
	130	30	3	2.5	140000	228000	K-JM 716649/K-JM 716610
	130	36	1.5	1.5	183000	310000	33017
	140	41	2.5	2	220000	340000	33117
85	150	30.5	2.5	2	176000	220000	30217
	150	38.5	2.5	2	212000	285000	32217
	150	49	2.5	2	286000	430000	33217
	180	44.5	4	3	303000	365000	30317
	180	44.5	4	3	242000	285000	31317
	180	63.5	4	3	402000	530000	32317
	180	63.5	4	3	391000	560000	32317 B
90	140	32	2	1.5	168000	270000	32018
	140	39	2	1.5	216000	355000	33018
	145	35	6	2.5	201000	305000	K-JM 718149/K-JM 718110
	150	45	2.5	2	251000	390000	33118
	155	46	3	3	286000	430000	T2ED 090
	160	32.5	2.5	2	194000	245000	30218
	160	42.5	2.5	2	251000	340000	32218
	160	49.5	2.5	2	261600	602700	215436 C

Taper roller bearings single row


Metric series

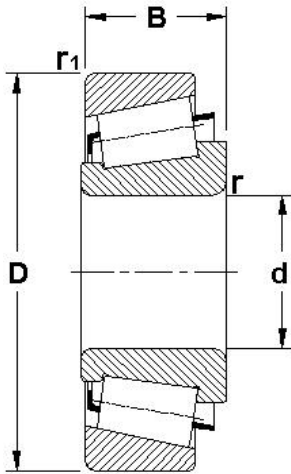

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
	175	48	4	4	270000	380000	T7FC 090
	190	46.5	4	3	330000	400000	30318
	190	46.5	4	3	264000	315000	31318
	190	67.5	4	3	457000	610000	32318
95	130	23	1.5	1.5	102000	183000	32919
	145	32	2	1.5	168000	270000	32019
	145	39	2	1.5	220000	375000	33019
	160	46	3	3	297000	455000	T2ED 095
	170	34.5	3	2.5	216000	275000	30219
	170	45.5	3	2.5	281000	390000	32219
	200	49.5	4	3	330000	390000	30319
	200	49.5	4	3	292000	355000	31319
100	200	71.5	4	3	501000	670000	32319
	145	24	3	3	125000	190000	T4CB 100
	150	32	2	1.5	172000	280000	32020
	150	39	2	1.5	224000	390000	33020
	160	41	3	3	246000	390000	K-JHM 720249/K-JHM 720210
	165	47	3	2.5	314000	480000	T2EE 100
	180	37	3	2.5	246000	320000	30220
	180	49	3	2.5	319000	440000	32220
	180	63	3	2.5	429000	655000	33220
	215	51.5	4	3	402000	490000	30320
	215	56.5	4	3	374000	465000	31320
215	77.5	4	3	572000	780000	32320	
105	145	25	1.5	1.5	129000	220000	32921
	160	35	2.5	2	201000	335000	32021
	190	39	3	3	257300	506900	214442 C
	160	43	2.5	2	246000	430000	33021
	190	39	3	2.5	270000	355000	30221
	190	53	3	2.5	358000	510000	32221
	225	53.5	4	3	429000	530000	30321
	225	58	4	3	402000	500000	31321

Taper roller bearings single row


Metric series

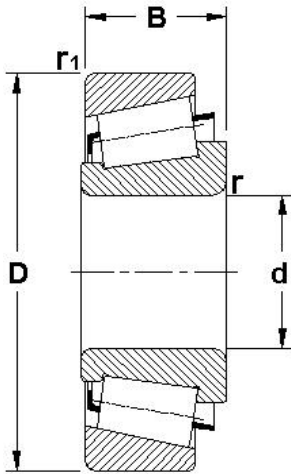

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
	225	81.5	4	3	605000	815000	32321
110	150	25	1.5	1.5	125000	224000	32922
	160	27	3	3	154000	232000	T4CB 110
	170	38	3	2.5	215300	534700	214244 C
	170	38	2.5	2	233000	390000	32022
	170	47	2.5	2	281000	500000	33022
	180	47	3	2.5	319000	520000	K-JHM 522649/K-JHM 522610
	180	56	2.5	2	369000	630000	33122
	200	41	3	2.5	308000	405000	30222
110	200	56	3	2.5	402000	570000	32222
	240	54.5	4	3	473000	585000	30322
	240	63.5	4	3	457000	585000	31322
	240	84.5	4	3	627000	830000	32322
120	165	29	1.5	1.5	176000	310000	32924
	170	27	3	3	157000	250000	T4CB 120
	180	38	2.5	2	242000	415000	32024
	180	48	2.5	2	292000	540000	33024
	215	43.5	3	2.5	341000	465000	30224
	215	61.5	3	2.5	468000	695000	32224
	260	59.5	4	3	561000	710000	30324
	260	68	4	3	539000	695000	31324
	260	90.5	4	3	792000	1120000	32324
130	180	32	2	1.5	198000	365000	32926
	185	29	3	3	194000	315000	T4CB 130
	200	45	2.5	2	314000	540000	32026
	230	43.75	4	3	369000	490000	30226
	230	67.75	4	3	550000	830000	32226
	280	63.75	5	4	627000	800000	30326
	280	72	5	4	605000	780000	31326
	280	98.75	5	4	858000	1180000	32326
140	190	32	2	1.5	205000	390000	32928

Taper roller bearings single row


Metric series

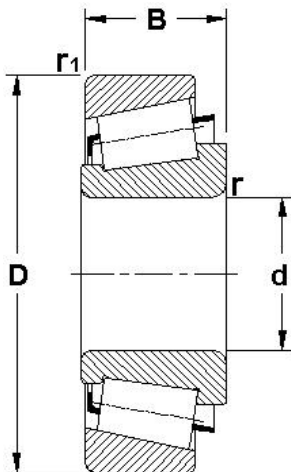

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
150	195	29	3	3	194000	325000	T4CB 140
	210	45	2.5	2	330000	585000	32028
	250	45.75	4	3	418000	570000	30228
	250	71.75	4	3	644000	1000000	32228
	300	67.75	5	4	737000	950000	30328
	300	77	5	4	693000	900000	31328
	210	32	3	3	233000	390000	T4DB 150
160	210	38	2.5	2	285000	500000	32930
	225	48	3	2.5	369000	655000	32030
	225	59	3	2.5	457000	865000	33030
	270	49	4	3	429000	560000	30230
	270	77	4	3	737000	1140000	32230
	320	72	5	4	825000	1060000	30330
	320	82	5	4	781000	1020000	31330
	320	114	5	4	1170000	1660000	32330
170	220	32	3	3	242000	415000	T4DB 160
	220	38	2.5	2	300000	530000	32932
	240	51	3	2.5	429000	780000	32032
	290	52	4	3	528000	735000	30232
	290	84	4	3	880000	1400000	32232
	340	75	5	4	913000	1180000	30332
180	230	38	2.5	2	286000	585000	32934
	260	57	3	2.5	512000	915000	32034
	310	57	5	4	616000	865000	30234
	310	91	5	4	1010000	1630000	32234
	360	80	5	4	1020000	1340000	30334
190	250	45	2.5	2	352000	735000	32936
	280	64	3	2.5	644000	1160000	32036
	320	57	5	4	583000	815000	30236
	320	91	5	4	1010000	1630000	32236
190	260	45	2.5	2	358000	765000	32938

Taper roller bearings single row

Metric series

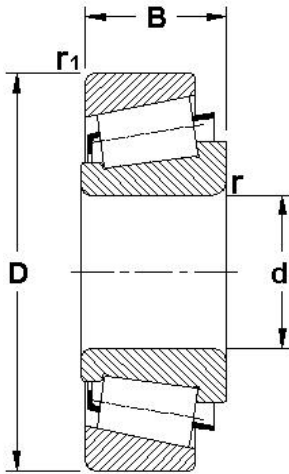

d mm	Dimensions		r	r1	Load ratings		Designation
	D	B			Dynamic C N	Static Co	
	290	64	3	2.5	660000	1200000	32038
	340	60	5	4	721000	1000000	30238
	340	97	5	4	1190000	1930000	32238
200	280	51	3	2.5	473000	950000	32940
	310	70	3	2.5	748000	1370000	32040
	360	64	5	4	792000	1120000	30240
	360	104	5	4	1210000	2000000	32240
220	285	41	4	3	396000	830000	T2DC 220
	300	51	3	2.5	500000	980000	32944
	340	76	4	3	897000	1660000	32044
	400	72	5	4	990000	1400000	30244
	400	114	5	4	1610000	2700000	32244
240	320	42	3	3	429000	815000	T4EB 240
	320	51	3	2.5	512000	1080000	32948
	360	76	4	3	935000	1800000	32048
	440	127	5	4	1940000	3350000	32248
260	360	63.5	3	2.5	750000	1500000	32952
	400	87	5	4	1170000	2200000	32052
	480	137	6	5	2200000	3650000	32252
	540	113	6	6	2120000	3050000	30352
280	380	63.5	3	2.5	765000	1660000	32956
	420	87	5	4	1210000	2360000	32056
300	420	76	4	3	1050000	2240000	32960
	460	100	5	4	1530000	2900000	32060
320	480	100	5	4	1540000	3100000	32064